



Westinghouse

INNOVATION YOU CAN BE SURE OF

WHXC3750-PRO

Portable Generator

Westinghouse Professional Series generators offer the highest levels of performance, reliability and safety in compliance with Australian WH&S regulations. Featuring an RCD safety switch and weatherproof outlet(s) to protect against electric shock, they are an ideal portable power source to operate your electrical appliances and tools.

Features and Benefits

Reliable Performance

High output and fuel efficient Westinghouse 208 cc 4-stroke overhead valve petrol engine.

Electrical Safety

RCD safety switch offers you WH&S mandated protection against electric shock.

Quiet Operation

Oversized Pulse-Flo muffler and anti-vibration rubber mounts ensure low noise output.

Long Running

Extended run time from the long range 15 litre fuel tank with integrated gauge and strainer.

Stable Power

Digital AVR controlled sine wave output for precise and stable electricity supply.

Premium Features

Copper wound alternator, full steel roll frame, fold-down handles and Never-Flat wheels.

Clean Air Technology

Compliant with Australian and US EPA emissions standards to minimise environmental impact.

Easy to Use

Yellow-coloured touch points guide you to the controls required for normal operation.

Plug and Play

Everything you need is in the box. Just add petrol. Minor assembly required.

Warranty Protection

2-year domestic use warranty to safeguard your investment (conditions apply).

3000/3750*


RUNNING WATTS STARTING WATTS
*4.7 kVA @ 0.8 PF



SINE WAVE OUTPUT
AVR EQUIPPED

RCD SAFETY SWITCH

Control Panel Functions

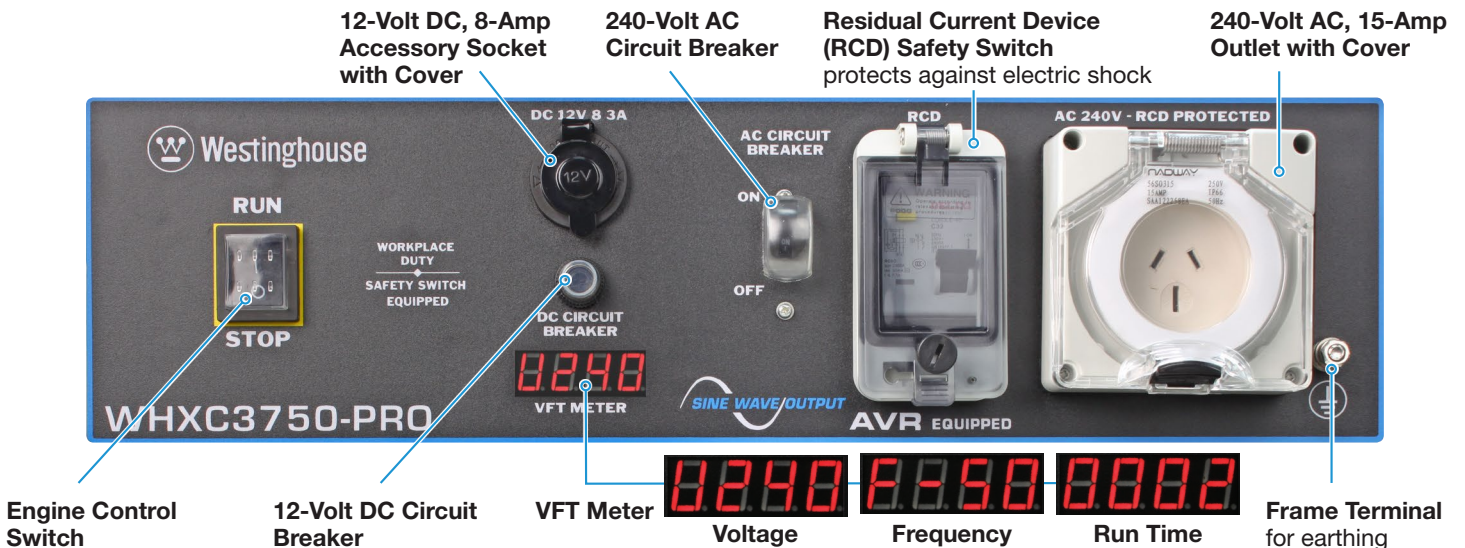

Power - when you need it - where you need it

Specifications

WHXC3750-PRO

ENGINE	
Type	1-Cylinder, 4-Stroke, Overhead Valve, Air Cooled
Displacement (cc)	208
Max. Speed (rpm)	3,000
Rated Power (kW / hp)	4.8 / 6.4
Oil Capacity (mL)	600
Low Oil Shutdown	Yes
Spark Plug	Torch F6RTC
Fuel	Unleaded Petrol
Fuel Tank Capacity (L)	15
Fuel Gauge	Yes
Starting Method	Recoil
Hour Meter	Yes
Run Time @ 50% Output (hr)	16.8
Noise Level @ 100% Output	76 dB(A) @ 7m
DIMENSIONS	
Length (mm)	645
Width (mm)	600
Height (mm)	555
WEIGHT	
Weight - Dry (kg)	52
Weight - Wet (kg)	64

240 VOLT AC ELECTRICAL	
Voltage (V)	240
Frequency (Hz)	50
No. of Phases	1
Running Power (W)	3,000
Starting Power (W)	3,750
Max. Output @ 0.8 PF (kVA) *	4.7
Max. Running Current (A)	12.5
Max. Starting Current (A)	15.6
Alternator Windings	Copper
Voltage & Waveform Control	Digital Automatic Voltage Regulator Sine Wave Output
Receptacle	15 A, IP66
Overload Protection	Circuit Breaker
RCD Safety Switch	Yes
Digital VFT Meter	Yes
Electrical Enclosure	IP23
12 VOLT DC ELECTRICAL	
Voltage (V)	12
Maximum Current (A)	8.3
Maximum Power (W)	100

* Theoretical value for comparison.

Specifications are subject to change without notice. 2019-02



Westinghouse

INNOVATION YOU CAN BE SURE OF

westinghousepower.com.au