



Westinghouse

INNOVATION YOU CAN BE SURE OF

iGen1200

Digital Inverter Generator

Westinghouse digital inverter generators offer you the ultimate in portable power convenience. Lightweight, fuel efficient and quiet, their mains-quality electrical output can safely power all of your sensitive electronic equipment. They're an essential part of your gear for caravanning and camping and also great for home as a backup power supply.

Features and Benefits

Powerful

1,200 Watts maximum output is the highest in its class to run more of your electrical devices.

Lightweight

At only 15 kg it can be easily carried by one person using the ergonomic non-slip handle.

Quiet

Ultra-silent running from only 51 dB(A) that won't disturb you or your neighbours.

Long Running

Up to 15 hours achieved by its fuel-efficient engine and biggest-in-class 2.8 L fuel tank.

Easy To Use

Yellow-coloured touch points guide you to the controls required for normal operation.

Mains Quality Electricity

Digital inverter technology safely powers all of your sensitive electronic equipment.

Clean Air Technology

4-stroke OHV petrol engine with Australian and US EPA compliant emission controls.

Plug and Play

Everything you need is in the box. No assembly required. Just add petrol.

Safety Protection

Electrical overload circuit breaker and low engine oil shutdown safeguards.

Warranty Protection

2-year domestic use warranty to safeguard your investment (conditions apply).

1000/1200*


RUNNING WATTS

STARTING WATTS

*1.2 kVA @ 1.0 PF



Control Panel Functions

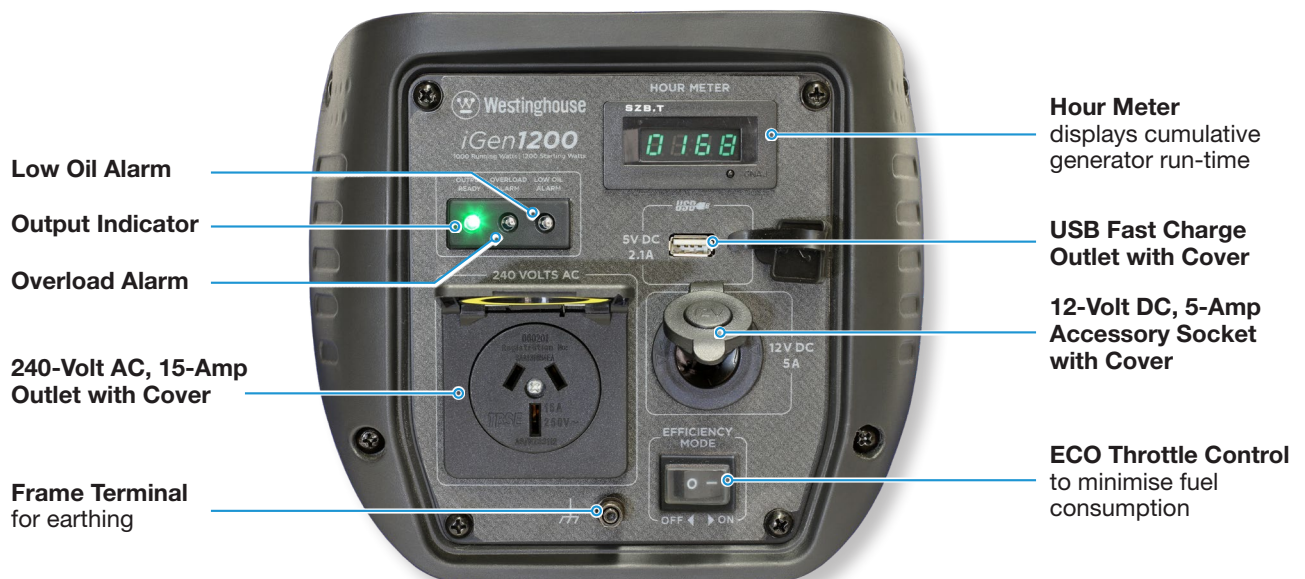

Power - when you need it - where you need it

Specifications

iGen1200

ENGINE	
Type	1-Cylinder, 4-Stroke, Overhead Valve, Air Cooled
Displacement (cc)	54
Max. Speed (rpm)	5,200
Rated Power (kW / hp)	1.3 / 1.8
Oil Capacity (mL)	250
Low Oil Shutdown	Yes
Spark Plug	Torch A5RTC
Fuel	Unleaded Petrol
Fuel Tank Capacity (L)	2.8
Fuel Gauge	No
Auto-Speed ECO Throttle	Yes
Starting Method	Recoil
Hour Meter	Yes
Run Time @ 225 / 900 W	9 / 4.5 hours
Noise Level @ 225 / 900 W	52 / 58 dB(A) @ 7m
DIMENSIONS	
Length (mm)	463
Width (mm)	262
Height (mm)	395
WEIGHT	
Weight - Dry (kg)	15
Weight - Wet (kg)	17

Specifications are subject to change without notice. 2019-02

240 VOLT AC ELECTRICAL	
Voltage (V)	240
Frequency (Hz)	50
No. of Phases	1
Running Power (W)	1,000
Starting Power (W)	1,200
Max. Output @ 1.0 PF (kVA)	1.2
Max. Running Current (A)	4.2
Max. Starting Current (A)	5
Voltage & Waveform Control	Digital Inverter, Pure Sine Wave Output
Total Harmonic Distortion (THD)	< 2.5%
Receptacle	15 A, IP44
Overload Protection	Electronic
Alternator	Brushless, Permanent Magnet
Output Indicator Light	Yes
12 VOLT DC ELECTRICAL	
Voltage (V)	12
Maximum Current (A)	5
Maximum Power (W)	60
Receptacle	5 A, IP44
5 VOLT DC ELECTRICAL	
Voltage (V)	5
Maximum Current (A)	2.1
Maximum Power (W)	10
Receptacle	USB Type A, IP44



Westinghouse
INNOVATION YOU CAN BE SURE OF

westinghousepower.com.au