



# Westinghouse

INNOVATION YOU CAN BE SURE OF

## iGen2200

## Digital Inverter Generator

Westinghouse digital inverter generators offer you the ultimate in portable power convenience. Lightweight, fuel efficient and quiet, their mains-quality electrical output can safely power all of your sensitive electronic equipment. They're an essential part of your gear for caravanning and camping and also great for home as a backup power supply.

### Features and Benefits

#### Powerful

High maximum power output of 2,200 Watts is able to run more of your electrical devices.

#### Lightweight

At only 21 kg it can be easily carried by one person using the ergonomic non-slip handle.

#### Quiet

Ultra-silent running from only 51 dB(A) that won't disturb you or your neighbours.

#### Long Running

Up to 19 hours achieved by its fuel-efficient engine and long range 4.3 litre fuel tank.

#### Easy To Use

Yellow-coloured touch points guide you to the controls required for normal operation.

#### Mains Quality Electricity

Digital inverter technology safely powers all of your sensitive electronic equipment.

#### Clean Air Technology

4-stroke OHV petrol engine with Australian and US EPA compliant emission controls.

#### Plug and Play

Everything you need is in the box. No assembly required. Just add petrol.

#### Safety Protection

Electrical overload circuit breaker and low engine oil shutdown safeguards.

#### Warranty Protection

2-year domestic use warranty to safeguard your investment (conditions apply).

# 1800 / 2200\*

RUNNING WATTS

STARTING WATTS

\*2.2 kVA @ 1.0 PF



### Control Panel Functions

Low Oil Alarm

Output Indicator

Overload Alarm

Hour Meter

displays cumulative generator run-time


USB Fast Charge Outlet with Cover

Engine, Fuel and Choke Control Switch

ECO Throttle Control to minimise fuel consumption

240-Volt AC, 15-Amp Outlet with Cover

Frame Terminal for earthing

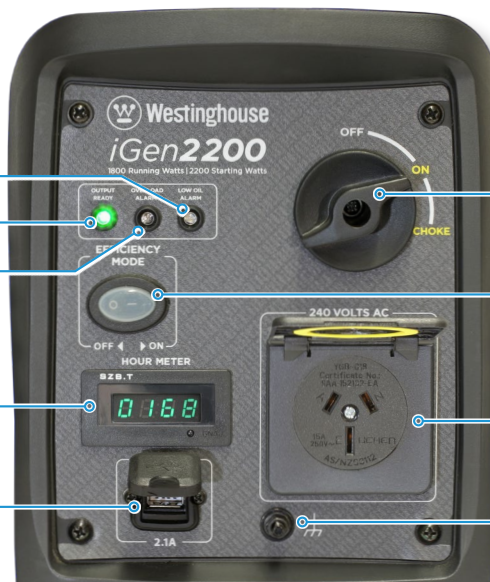

## Power - when you need it - where you need it

# Specifications

# iGen2200

ENGINE	
Type	1-Cylinder, 4-Stroke, Overhead Valve, Air Cooled
Displacement (cc)	79
Max. Speed (rpm)	5,300
Rated Power (kW / hp)	2.2 / 3.0
Oil Capacity (mL)	350
Low Oil Shutdown	Yes
Spark Plug	Torch E6RTC
Fuel	Unleaded Petrol
Fuel Tank Capacity (L)	4.3
Fuel Gauge	No
Auto-Speed ECO Throttle	Yes
Starting Method	Recoil
Hour Meter	Yes
Run Time @ 450 / 1,800 W	10 / 5 hours
Noise Level @ 400 / 1,600 W	52 / 61 dB(A) @ 7m
DIMENSIONS	
Length (mm)	500
Width (mm)	285
Height (mm)	450
WEIGHT	
Weight - Dry (kg)	21
Weight - Wet (kg)	24.5

240 VOLT AC ELECTRICAL	
Voltage (V)	240
Frequency (Hz)	50
No. of Phases	1
Running Power (W)	1,800
Starting Power (W)	2,200
Max. Output @ 1.0 PF (kVA)	2.2
Max. Running Current (A)	7.5
Max. Starting Current (A)	9.2
Voltage & Waveform Control	Digital Inverter, Pure Sine Wave Output
Total Harmonic Distortion (THD)	< 2.5%
Receptacle	15 A, IP44
Overload Protection	Electronic
Alternator	Brushless, Permanent Magnet
Output Indicator Light	Yes
5 VOLT DC ELECTRICAL	
Voltage (V)	5
Maximum Current (A)	2.1
Maximum Power (W)	10
Receptacle	USB Type A, IP44

Specifications are subject to change without notice. 2019-02



# Westinghouse

INNOVATION YOU CAN BE SURE OF

westinghousepower.com.au